


MED B-000016G

A-60 Floating floor



	Product	Thickness	Density
Plate	SeaRox SL 436 SeaRox SL 440 SeaRox SL 480	60 mm	140-200 kg/m ³

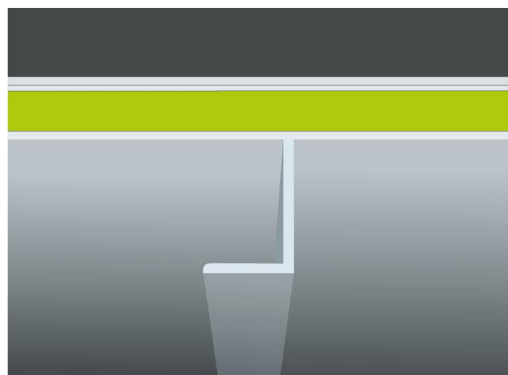


Construction notes:

- The floor insulated with 60 mm SeaRox SL 436, SeaRox SL 440 or SeaRox SL 480.
- Insulation covered by a 2 x 1.5 mm steel plate glued together with a two-component solvent-free glue (certified for low flame spread).

Application notes:

- Do not step directly on the wool during installation. Always use a board or similar when moving around on the wool.
- To avoid sound from travelling finishing the construction with a rigid ROCKWOOL product placed edgewise and sealed with a flexible sealant is recommended.

Advantages:

-  Ensures highest fire safety on board
-  Secures excellent noise reduction and better comfort
-  Lowest water absorption - optimal insulation performance

Covering:

- The wool must be covered by at least two layers of 1.5 mm thick steel sheets glued together with butted joints.
- Indication for static load on insulation material:
 - SeaRox SL 436: ≥ 12 kPa
 - SeaRox SL 440: ≥ 30 kPa
 - SeaRox SL 480: ≥ 40 kPa

Construction details

