


# SeaRox® Tape ALU-G

SeaRox Tape ALU-G is a self-adhesive textured aluminium tape on a glass cloth backing, lined with siliconised paper.

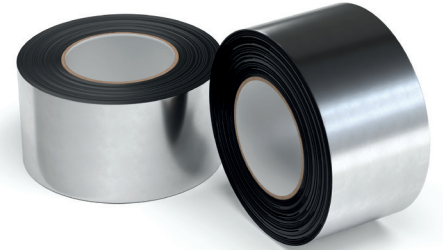

## Application

The tape is used to seal joints between SeaRox ALU and ALU-G faced stone wool products.

## Product properties

Product property	Performance	Norms
Thickness (total)	170 µm	
Colour	Colour Silver /Alu	
Operating temperature	-30°C to +100°C	
Application temperature	+10°C to +50°C	
Fire classification	Low flame spread	IMO 2010 FTP Code

## Installation


The surface must be clean, dry, and free of grease, oil and other contaminants.  
Adequate pressure should be used when applying to any surface.  
The user must evaluate product suitability for any application.

As ROCKWOOL has no control over insulation design and workmanship, accessory materials or applications conditions, ROCKWOOL does not warranty the performance or result of any installation containing ROCKWOOL products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose. ROCKWOOL Technical Insulation reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.

## Storage

12 months when stored out of direct sunlight at 21°C / 50% relative humidity.

ROCKWOOL® Technical Insulation, ROCKWOOL®, SeaRox® and ProRox® are registered trademarks of ROCKWOOL A/S and cannot be used without a prior written consent.



0575