


SeaRox® MA 720 ALU

SeaRox MA 720 ALU is a soft, lightweight mat made of stone wool. SeaRox MA 720 ALU is supplied as a highly compressed roll. The product is as standard supplied with reinforced alu foil.

Application

SeaRox MA 720 ALU is used for comfort insulation. The high compression reduces the transport cost significantly.

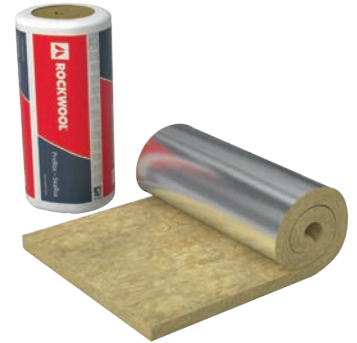

Product properties

Properties	Performance			Norm
Thermal conductivity	T (°C) λ (W/mK)	10 0,035	50 0,045	EN 12667
Nominal density	32 kg/m ³			EN 1602 / IMO
Compressive strength	-			EN 826
Fire classification	Non-combustible Low flame-Spread Properties			Acc. IMO FTP code
Water absorption (short term)	< 1 kg/m ²			EN 1609 AC
Max. Application Temperature	Wool: 250°C Facing: 80°C			-
Sound absorption directly mounted	-			ISO 354 (approximated) Evaluated after ISO 11 654
Facings	Reinforced alu foil			IMO A.653(16) (low flame - spread)


Dimensions

SeaRox MA 720 ALU

Thickness (mm): 50 mm Length (mm): 4000 mm Width (mm): 1000 mm

Thickness (mm): 100 mm Length (mm): 4000 mm Width (mm): 1000 mm

Local variations in standard dimensions might occur.



0575



0097

As ROCKWOOL has no control over insulation design and workmanship, accessory materials or applications conditions, ROCKWOOL does not warranty the performance or result of any installation containing ROCKWOOL products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose. ROCKWOOL Technical Insulation reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.

ROCKWOOL® Technical Insulation, ROCKWOOL®, SeaRox® and ProRox® are registered trademarks of ROCKWOOL International A/S and cannot be used without a prior written consent.